



AMFOR INC.


AMFOR 3.8", 4.3", 6.3", 8.0",8.3" Microfiltration Spiral Element Series for Food, Dairy, Pharmaceutical and Biological Applications

PRODUCT DESCRIPTION	Membrane Chemistry:	Proprietary semi-permeable polyethersulfone (PES)		
	Construction:	Sanitary spiral wound element with net outer wrap		
	Membrane MWCO:	MWCO:	0.1um	0.2um
	WATERFLUX (Lmh/bar)	1000	2500	3500

SPECIFICATION	Model	Active	Membrane	Area	
		Spacer (31 mil) ft2 3838 4338 6338 8040 8338	Spacer (46 mil) ft2 (7.1) (9.9) (22.0) (34.4) (37.2)	Spacer (65 mil) ft2 (4.3) (5.4) (13.3) (21.9) (24.1)	Spacer (80 mil) ft2 (3.4) (4.6) (10.9) (16.7) (19.1)

PLEASE NOTE: Customized service of special configuration is available from us!

OPERATION SPECIFICATION	Max. Inlet Pressure	116Psi (8.0bar)
	Min. Outlet Pressure	10Psi (0.7bar)
	Max. Differential Pressure per Element	18Psi (1.2bar)
	Max. Operation Temperature	122°F (50 °C) (Heat sanitizable90°C)
	Max. CIP Temperature	131°F (55 °C) (Heat sanitizable90°C)
	Max. PH Range during Operation@25°C	2.0-11.0
	Max. PH Range during CIP Operation@25°C	1.0-11.0

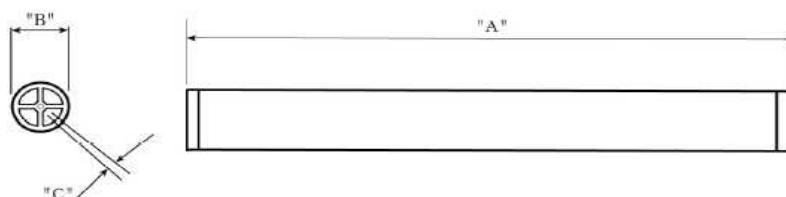

DIMENSION	Model	A Inches (mm)	B Inches (mm)	C Inches (mm)
	3838	38.0(965)	3.8(96)	0.831(21.1)
	4338	38.0(965)	4.3(109)	0.831(21.1)
	6338	38.0(965)	6.3(160)	1.138(28.9)
	8040	40.0(1016)	8.0(201)	1.138(28.9)
	8338	38.0(965)	8.3(210)	1.138(28.9)