



AMFOR INC.


AMFOR 3.8", 4.3", 6.3", 8.0", 8.3" Ultrafiltration Spiral Element Series for Electrocoat paint recovery, Textile size recovery, Clarification Applications

PRODUCT DESCRIPTION	Membrane Chemistry:	Proprietary semi-permeable Polyvinylidene fluoride (PVDF)	
	Membrane MWCO:	Separation range of 50000, 100000 Daltons	
	Construction:	Sanitary spiral wound element with net outer wrap	
	WATERFLUX (Lmh/bar)	MWCO: 50000 100000	
		230	300

SPECIFICATION	Model	Active	Membrane	Area
		Spacer (31 mil) ft2 (m2)	Spacer (46 mil) ft2 (m2)	Spacer (65 mil) ft2 (m2)
	3838	76 (7.1)	60 (5.6)	46 (4.3)
	4338	107 (9.9)	83 (7.7)	58 (5.4)
	6338	237 (22.0)	186 (17.3)	143 (13.3)
	8040	370 (34.4)	293 (27.2)	235 (21.9)
	8338	400 (37.2)	320 (29.7)	260 (24.1)
				Spacer (80 mil) ft2 (m2)
				37 (3.4)
				50 (4.6)
				117 (10.9)
				180 (16.7)
				206 (19.1)

PLEASE NOTE: Customized service of special configuration is available from us!

OPERATION SPECIFICATION	Typical Operating Pressure	30-116 psi (2.1-8.0bar)
	Max. Inlet Pressure	116Psi (8.0bar)
	Min. Outlet Pressure	10Psi (0.7bar)
	Max. Differential Pressure per Element	18Psi (1.2bar)
	Max. Operation Temperature	122°F (50 °C) (Heat sanitizable90°C)
	Max. CIP Temperature	131°F (55 °C) (Heat sanitizable90°C)
	Max. PH Range during Operation@25°C	2.0-11.0
	Max. PH Range during CIP Operation@25°C	1.0-11.0

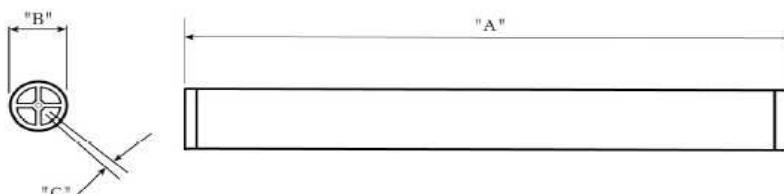

DIMENSION

Model	A Inches (mm)	B Inches (mm)	C Inches (mm)
3838	38.0(965)	3.8(96)	0.831(21.1)
4338	38.0(965)	4.3(109)	0.831(21.1)
6338	38.0(965)	6.3(160)	1.138(28.9)
8040	40.0(1016)	8.0(201)	1.138(28.9)
8338	38.0(965)	8.3(210)	1.138(28.9)